



Iraqi Kurdistan Region
 Presidency of Ministries Council
 Establishment of Kurdistan Region's
 Rehabilitation Projects

هه‌زاره‌ی کوردستانێ ئێه‌راکی
 ئه‌ه‌دیه‌ی کوردستانێ ئێه‌راکی
 دێه‌گانی یۆرتنه‌کی کۆدانه‌که‌ی شه‌ه‌ری کهره‌مجان

Particular Conditions of Contract

Project Name: Construction of Play Yard
 Location: Kifri town

- All the Works must be executed according to the attached Specification of the roads and bridges and General Specification published by the Ministry of Local Government - State Organization for Water & Sewerage Projects - General Establishment of Operation for Water & Sewerage Projects, Republic of Iraq, drawings and the instructions of the Resident Engineer.
- All sampling and testing shall be performed according to the above specification and to the "Construction Work Specification of the National Center of Construction Laboratories of Iraq (NCCLI)". Unless otherwise specified in the Bill of Quantities and Drawings.
- The Item Description hereinafter means "Supply all Materials, Manpower, Transportation, Equipment, Tools, Machinery, Shutting and all the required (Works) for the execution of the item".
- All the Construction Materials should be New, Best available in the local market and approved by the Site Engineer. The contractor should obtain the approval of the Site Engineer before using and incorporating into the works any construction, sanitary and other material.
- The Contractor must employ a permanent Civil Engineer to be present daily on the project site from the date of handing over the site to the contractor up to the completion of the project.
- The contractor shall provide for the Whole duration of the contract a temporary furnished office for the Site Engineer of at least one room of a total area not less than 15 m² in addition to a toilet with ceramic, W.C and ceramic wash basin with potable water supply. The office shall be provided with two steel tables with drawers, 6 chairs and cooling and/or heating facility as required.
- The contractor should obtain the written approval of the Engineer's representative or the Site Engineer wherever he intends to cast concrete or start the execution of any stage of an item of the work, indicating the location or locations of the work intended to be executed.
- In case of the contractor pricing for the item of "Site Preparation" unreasonably high, the agency reserves the right to pay for that item in proportion to the overall progress of works on the project.

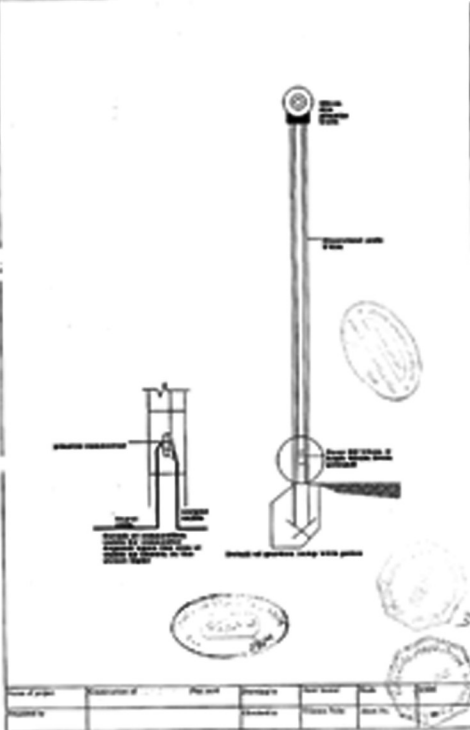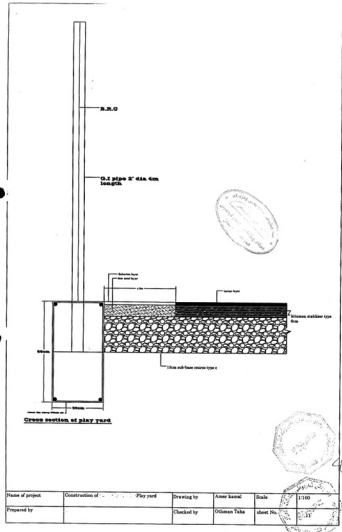

Iraqi Kurdistan Region
 Presidency of Ministries Council
 Establishment of Kurdistan Region's
 Rehabilitation Projects

Project Name: Construction of Play Yard
 Location: Kifri town
 Code No.: SUL/NW/RY/04/041

#	DESCRIPTION	Unit	Quantity	Price ID	Amount ID
A. Construction of Play Yard:					
1	Site preparation: Providing machine and labor for clearing the site and removing of debris, this item include sub-grade leveling & compaction and setting the layout of the site.	L.S	1		
2.1	Providing materials and laying 1 layer of 150mm thick bedrock of granular material type C with compaction of minimum 95% MDD.	m ³	800		
2.2	Providing materials and laying 1 layer of 150mm thick bedrock of granular material type C with compaction of minimum 95% MDD.	m ²	960		
3	Providing materials and heavy paper of (Tartan) to cover the playing area using approved glass. The surface should be well smoothed and properly polished. The type & color as submitted by the site Engineer.	m ²	515		
4	Providing and laying approved (Beharthon) layer. The price include all requirements according the instruction of site Engineer.	m ²	475		
5	Electrical installation: Electrical points including provision and installation of all type of cables, main switches, circuit breakers, projectors and main boards according to the drawing, specification and the instruction of site Engineer.	L.S	1		
6	Fencing work: Supplying and erect metal fence around the playing with B.R.C and galvanneal CI pipe 2" diameter (1.8m high) and covered with Plastic Paper 1 at interval of 2m C/C and the height of 4m, the price including all the foundation according to the drawing and the approved instruction.	M	128		
7	Providing and installing pools of Basketball, Volleyball and Handball games, ball of (Basket, Volley and Hand) each 1 no. and standard size marking of the back of play yard with approved painting, with all accessories and necessary works according to the drawing and instruction of the site Engineer.	L.S	1		
8	Garden works: providing materials and laying tiles and trees around the play yard & watering pool according to the drawing and instruction of site Engineer.	m ²	600		
Total Cost ID					

